


CHLORINE SCRUBBER PRODUCT INFORMATION

Double Stage 1F1P

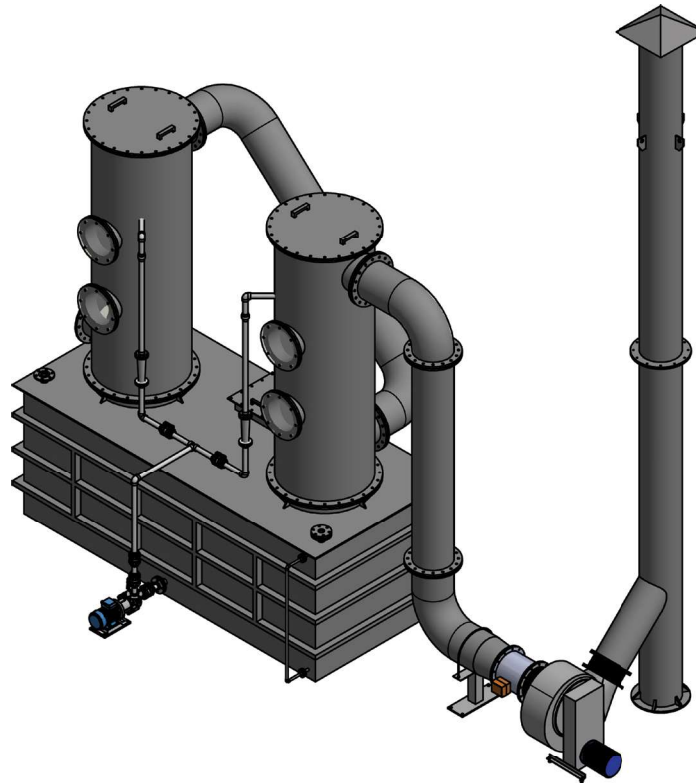

General Specifications (if different specifications is required, please contact us for customisation)		
Description	Value	
Scrubber Type	Counterflow packed column	
Volume of raw gas	max. 1000 kg/h	
Neutralisation agent	15% - 20% caustic soda (NaOH)	
Tank volume	Approx. 10 m3 max	
Material	FRP	
Packed Column Material	Tellerette Polypropylene (PP)	
Circulation pump		
Version	Magnetic Centrifugal Pump	
Capacity	26 m3/h @ 29mH max	
Power	415 V / 3 Ph / 50 Hz / 3.7 kW	
Motor speed	2900 rpm	
Fan		
Version	Centrifugal Fan	
Option 1	Capacity	5000 m3/h @ 1.3 kPa
	Fan speed	3000 rpm
	Power	415 V / 3 Ph / 50 Hz / 4 kW
Option 2	Capacity	6000 m3/h @ 1.2 kPa
	Fan speed	3000 Rpm
	Power	415 V / 3 Ph / 50 Hz / 4 kW

Lutz-Jesco GmbH

Am Bostelberge 19
30900 Wedemark, Germany

Phone: +49 5130 5802-0
Fax : +49 5130 5802 68

Email: info@lutz-jesco.com
Internet: www.lutz-jesco.com

Lutz-Jesco East Asia
Sdn Bhd

6 Jalan Saudagar U1/16A
Hicom Glenmarie Ind. Park
40150 Shah Alam, Malaysia

Phone: +603 5569 2322
Fax : +603 5569 1322

Email: info@lutz-jescoasia.com
Internet: www.lutz-jescoasia.com

**Dosing
Conveying
Control** | Liquids
Gases
Systems